


Cable binders TY (with metal tongue, Thomas & Betts)

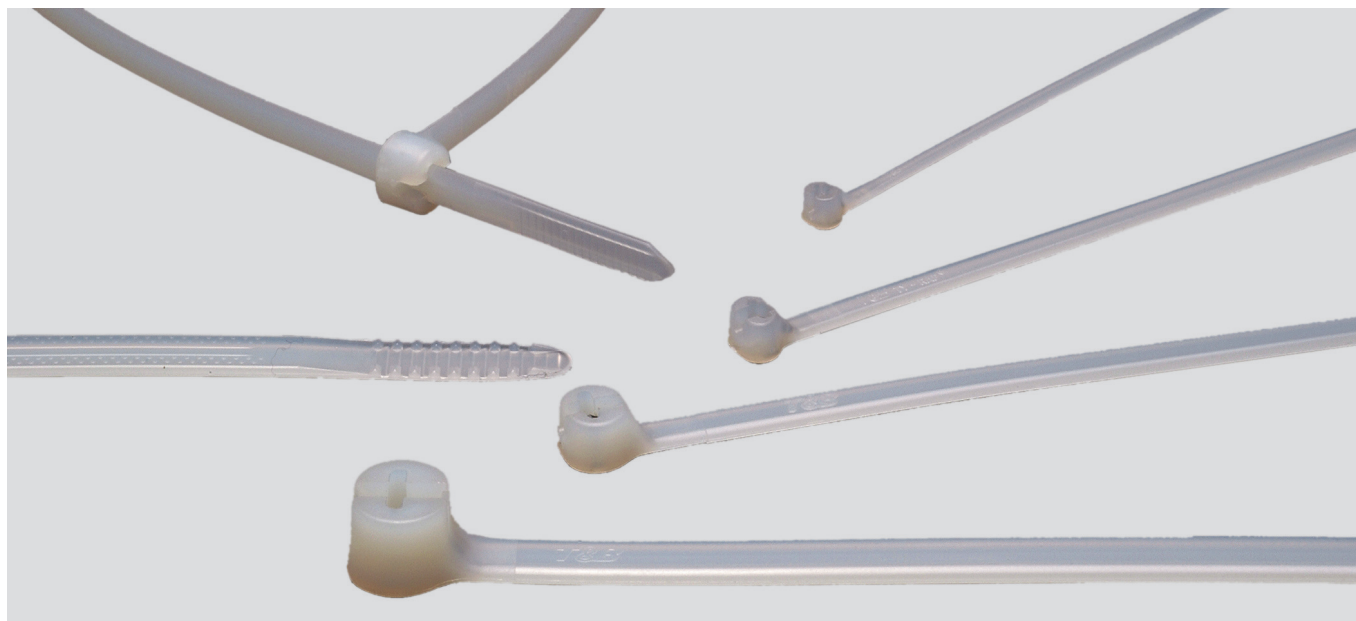

TY-RAP® transparent

TY-RAP® Cable binder with steel lug lock made of corrosion-resistant, non-magnetic steel.

This technology enables the binder to offer excellent binding properties even under the most rigorous conditions such as heat, cold, humidity etc. and makes it insensitive to vibrations and external influences.

Material

- halogen-free polyamide 6.6

Technical data

Temperature range: -40°C to +85°C
Flammability acc. to UL 94 V2

Note

Brown, red, orange, yellow, green, purple or grey available on request.

Part No. transparent	Type T & B	Length mm	Width mm	Bundle Ø mm	Load capacity kp	Unit	net EUR/100 items at acceptance of		
							up to 1000	1001 - 5000	5001 - 10000
91051	TYB 23M	92,0	2,4	16,0	8,1	1000	o. r.	o. r.	o. r.
91055	TY 232M	200,0	2,4	50,0	8,1	1000	o. r.	o. r.	o. r.
91058	TY 234M	356,0	2,4	102,0	8,1	1000	o. r.	o. r.	o. r.
91061	TYB 24M	140,0	3,6	29,0	18,0	1000	o. r.	o. r.	o. r.
91064	TY 242M	208,0	3,6	50,0	18,0	1000	o. r.	o. r.	o. r.
91067	TY 26M	281,0	3,6	76,0	18,0	1000	o. r.	o. r.	o. r.
91070	TY 244M	368,0	3,6	103,0	18,0	1000	o. r.	o. r.	o. r.
91073	TYB 25M	186,0	4,8	45,0	22,5	1000	o. r.	o. r.	o. r.
91076	TY 253M	293,0	4,8	78,0	22,5	1000	o. r.	o. r.	o. r.
91079	TY 28M	360,0	4,8	102,0	22,5	1000	o. r.	o. r.	o. r.
91082	TY 272M	203,0	7,0	50,0	54,4	500	o. r.	o. r.	o. r.
91085	TY 27M	338,0	7,0	90,0	54,4	500	o. r.	o. r.	o. r.
91088	TY 29M	762,0	7,0	229,0	54,4	500	o. r.	o. r.	o. r.

o. r. = on request