


Braided hose HGP

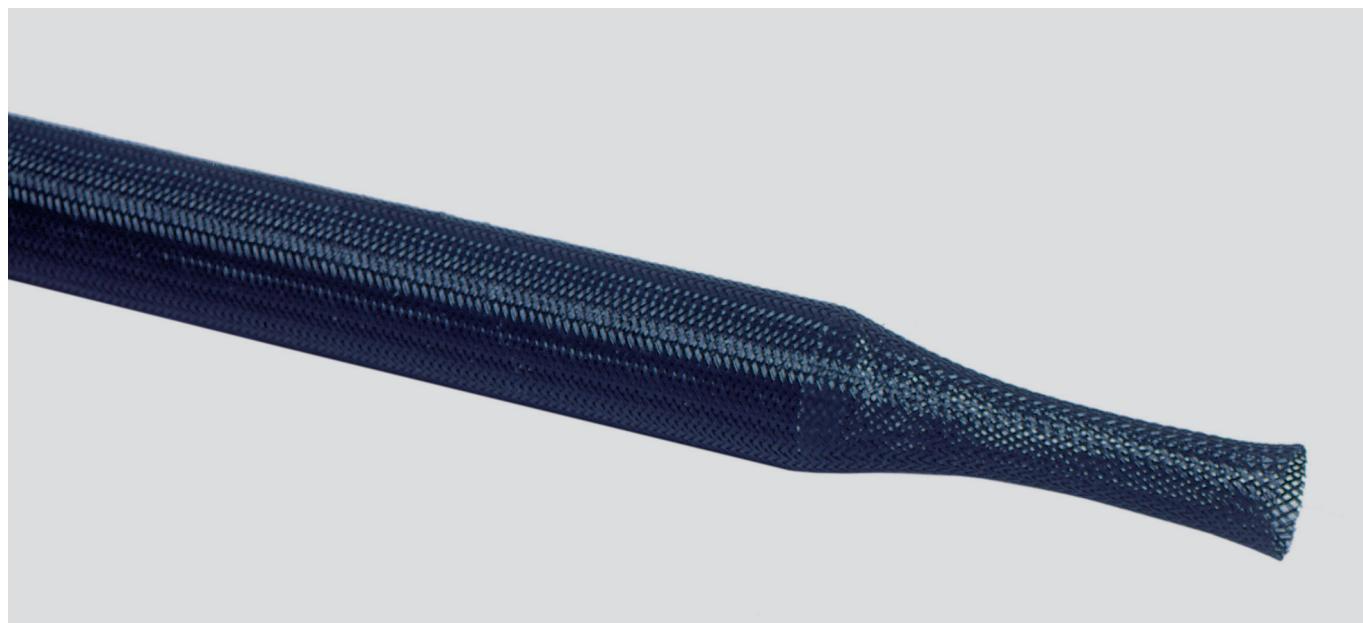

HGP

The polyester braided sleeve for directionality and for the mechanical protection of electrical cables and lines.

Properties

Axially compressible

Application

Plant and machine construction Robot construction Automation technology Vehicle construction and shipbuilding Rail technology Installation technology Control cabinet construction

Material

Polyester

- halogen-free self-extinguishing acc. to ISO 3795

Technical data

Temperature range: -50°C to +150°C
Temperature temporary up to: +220°C

Part No. grey	Part No. black	Min. inner Ø mm	Max. inner Ø mm	Per metres	net EUR/100 metres at acceptance of		
					up to 100	101 - 500	501 - 1000
94900	98136	1,0	5,0	100,0	o. r.	o. r.	o. r.
94901	98137	2,0	7,0	100,0	o. r.	o. r.	o. r.
94902	98138	3,0	9,0	100,0	o. r.	o. r.	o. r.
94903	98139	4,0	11,0	100,0	o. r.	o. r.	o. r.
94904	98140	5,0	12,0	100,0	o. r.	o. r.	o. r.
94905	98141	7,0	15,0	100,0	o. r.	o. r.	o. r.
94906	98142	8,0	17,0	50,0	o. r.	o. r.	o. r.
94907	98143	10,0	20,0	50,0	o. r.	o. r.	o. r.
94908	98144	14,0	26,0	25,0	o. r.	o. r.	o. r.
94909	98145	18,0	34,0	25,0	o. r.	o. r.	o. r.
94910	98146	20,0	40,0	25,0	o. r.	o. r.	o. r.
94911	98147	30,0	50,0	25,0	o. r.	o. r.	o. r.
94912	98148	40,0	66,0	25,0	o. r.	o. r.	o. r.

o. r. = on request