


# Shrink-on tube SVRO (FPM)

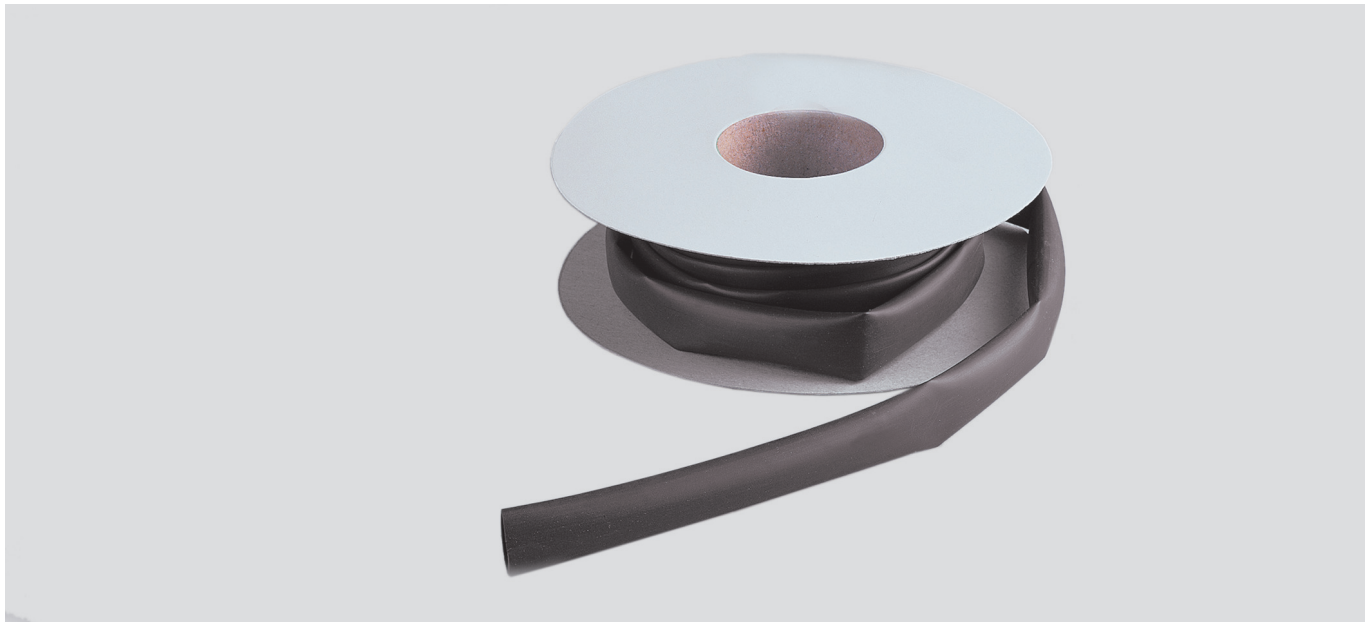

## SVRO

FPM shrunk tube to protect against aggressive media.

## Properties

Weather, flame and chemical resistant

## Application

Plant and machine construction Robot construction Automation technology Vehicle construction and shipbuilding Installation technology Control cabinet construction

## Material

FPM

flame-retardant

Colour: black

## Note

MIL-I-23053

## Technical data

Temperature range: -55°C to +220°C

Shrinking temperature: +180°C

Shrinking rate: 2:1

Part No.	Inner Ø before shrinkage mm	Length mm	Inner Ø after shrinkage mm	Unit	net EUR/100 metres at acceptance of		
					up to 100	101 - 500	501 - 1000
96796	3,2	-	1,6	50,0	o. r.	o. r.	o. r.
97385	4,8	-	2,4	50,0	o. r.	o. r.	o. r.
97774	6,4	-	3,2	50,0	o. r.	o. r.	o. r.
91165	9,5	-	4,8	50,0	o. r.	o. r.	o. r.
91166	12,7	-	6,4	30,0	o. r.	o. r.	o. r.
93690	19,1	-	9,5	30,0	o. r.	o. r.	o. r.
93691	25,4	-	12,7	30,0	o. r.	o. r.	o. r.
93692	38,1	-	19,1	15,0	o. r.	o. r.	o. r.
93695	50,8	-	25,4	15,0	o. r.	o. r.	o. r.

o. r. = on request