


N2XCH power cable, 0,6/1kV, halogen-free, with concentric conductor, without functionality

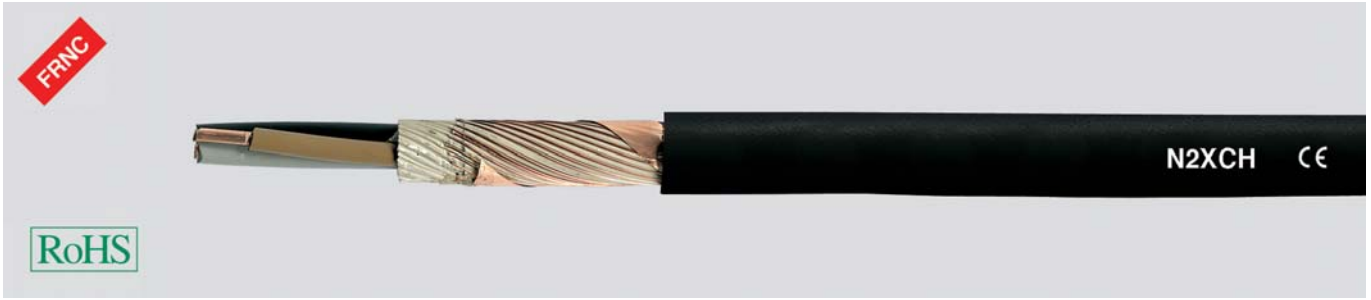

Technical data

- Power and control cable according to DIN VDE 0276 part 604, HD 604 S1 part 1 and part 5G
- **Conductor resistance** (at 20°C) according to VDE 0295 cl. 1 or 2 and IEC 60228 cl. 1 or 2 and HD 383 cl. 1 and cl. 2
- **Temperature range** during installation -5°C to +50°C for fixed installation -30°C to +90°C
- Permissible **operating temperature** at conductor 90°C
- **Nominal voltage** U_0/U 0,6/1 kV
- **Test voltage** 4 kV
- **Minimum bending radius** single-core approx. 15x cable Ø multi-core approx. 12x cable Ø
- **Radiation resistance** up to 100x10⁶ cJ/kg (up to 100 Mrad)
- **Caloric load values** see Technical Informations

Cable construction

- Plain Cu wire conductor, single or multiple-wire, according to DIN VDE 0295 cl. 1 or 2, BS 6360 cl. 1 or 2 and IEC 60228 cl. 1 or 2, HD 383
- Halogen-free core insulation, cross-linked polyethylene compound 2X11, to HD 604 S1
- Colour coding of cores according to DIN VDE 0293-308 and HD 186
- Cores stranded in layers (for multi-core cables)
- Overall filled inner sheath, covered by filling compound or wrapped tape
- Concentric conductor of plain Cu wires
- Outer sheath of thermoplastic polyolefine compound HM4, to HD 604 S1
- Sheath colour black
- **LSOH** = Low Smoke Zero Halogen-free.
- **Note** rm = round conductor, multiple-wire; re = round conductor, single-wire.

Properties

- Halogen-free, no liberation of corrosive or toxic gases
- Limited propagation of fire
- Low smoke development
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers

Tests

- Flame test to DIN VDE 0482 part 266-2/ HD 405.3, BS 4066 part 3/ EN 50266-2/ IEC 60332-3 (equivalent DIN VDE 0472 part 804 test method C)
- Corrosiveness of combustion gases according to DIN VDE 0482 part 267/ EN 50267-2-2/ IEC 60754-2 (equivalent DIN VDE 0472 part 813)
- Halogen-free according to DIN VDE 0482 part 267/ EN 50267-2-1/ IEC 60754-1 (equivalent DIN VDE 0472 part 815)
- Smoke density according to DIN VDE 0482 part 1034-1+2, HD 606, DIN EN 61034-1+2/ IEC 61034-1+2, BS 7622 part 1+2 (equivalent DIN VDE 0472 part 816)

Application

See also type N2XH. The concentric conductor can be used as PE- PEN conductor or as screen. Suitable for fixed installation in dry, damp or wet environments, in, above, on and beneath plaster as well as in masonry walls and in concrete. These cables are suitable for outdoor applications and in underground by using in conduits or tubes.

CE – The product is conformed with the EC Low-Voltage Directive 73/23/EEC and 93/68/EEC.

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
53200	2 x 1,5 / 1.5 re	14,0	53,0	250,0	16
53201	2 x 2,5 / 2.5 re	15,0	81,0	280,0	14
53202	2 x 4 / 4 re	14,0	122,0	320,0	12
53203	2 x 6 / 6 re	15,0	183,0	400,0	10
53204	2 x 10 / 10 re	16,0	311,0	560,0	8
53205	2 x 16 / 16 re	19,1	490,0	780,0	6
53206	3 x 1,5 / 1.5 re	14,5	67,0	250,0	16
53207	3 x 2,5 / 2.5 re	15,5	104,0	320,0	14
53208	3 x 4 / 4 re	16,5	161,0	400,0	12
53209	3 x 6 / 6 re	18,0	242,0	500,0	10
53210	3 x 10 / 10 re	20,0	408,0	750,0	8
53211	3 x 16 / 16 re	22,5	643,0	1000,0	6
53212	3 x 25 / 16 rm	27,0	1001,0	1600,0	4
53213	3 x 35 / 16 rm	27,5	1190,0	1900,0	2
53214	3 x 50 / 25 rm	32,3	2003,0	2400,0	1
53215	3 x 70 / 35 rm	35,6	2794,0	3060,0	2/0
53216	3 x 95 / 50 rm	39,0	3790,0	4200,0	3/0
53217	3 x 120 / 70 rm	42,0	4785,0	5207,0	4/0
53218	3 x 150 / 70 rm	43,5	5100,0	5700,0	300 kcmil
53219	3 x 185 / 95 rm	47,4	6381,0	7150,0	350 kcmil
53220	3 x 240 / 120 rm	53,5	8240,0	9250,0	500 kcmil

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
53221	4 x 1,5 / 1.5 re	15,5	81,0	300,0	16
53222	4 x 2,5 / 2.5 re	16,5	129,0	380,0	14
53223	4 x 4 / 4 re	17,5	202,0	480,0	12
53224	4 x 6 / 6 re	19,0	297,0	600,0	10
53225	4 x 10 / 10 re	21,5	504,0	850,0	8
53226	4 x 16 / 16 re	24,5	797,0	1200,0	6
53227	4 x 25 / 16 rm	29,0	1142,0	1800,0	4
53228	4 x 35 / 16 rm	29,5	1528,0	2100,0	2
53229	4 x 50 / 25 rm	32,5	2203,0	2800,0	1
53230	4 x 70 / 35 rm	38,0	3082,0	3800,0	2/0
53231	4 x 95 / 50 rm	43,5	4208,0	5100,0	3/0
53758	4 x 120 / 70 rm	50,5	5382,0	6556,0	4/0
53759	4 x 150 / 70 rm	52,1	6540,0	7600,0	300 kcmil
53760	4 x 185 / 95 rm	57,2	8159,0	9370,0	350 kcmil
53761	4 x 240 / 120 rm	62,6	10546,0	11611,0	500 kcmil
53232	7 x 1,5 / 2.5 re	14,5	132,0	320,0	16
53239	7 x 2,5 / 2.5 re	15,1	200,0	400,0	14
53246	7 x 4 / 4 re	18,1	316,0	580,0	12
53233	10 x 1,5 / 2.5 re	17,2	177,0	420,0	16
53240	10 x 2,5 / 4 re	18,9	287,0	550,0	14

Dimensions and specifications may be changed without prior notice.

Continuation ▶

N2XCH power cable, 0,6/1kV, halogen-free, with concentric conductor, without functionality



Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
53234	12 x 1,5 / 2,5 re	18,4	204,0	460,0	16
53241	12 x 2,5 / 4 re	19,2	335,0	610,0	14
53247	12 x 4 / 6 re	22,6	528,0	910,0	12
53235	16 x 1,5 / 4 re	20,0	275,0	686,0	16
53242	16 x 2,5 / 6 re	20,9	450,0	805,0	14
53236	21 x 1,5 / 6 re	22,6	370,0	766,0	16
53243	21 x 2,5 / 6 re	25,2	572,0	1015,0	14

Part No.	No. cores x cross-sec. mm ²	Outer ø ca. mm	Cop. weight kg / km	Weight ca. kg / km	AWG-No.
53237	24 x 1,5 / 6 re	23,2	412,0	800,0	16
53244	24 x 2,5 / 10 re	26,1	695,0	1100,0	14
53238	30 x 1,5 / 6 re	24,3	500,0	930,0	16
53245	30 x 2,5 / 10 re	28,0	842,0	1290,0	14

Dimensions and specifications may be changed without prior notice.